


Transmission Range Switch (w/ A/T) 4.3L Shown, 2.2L Similar

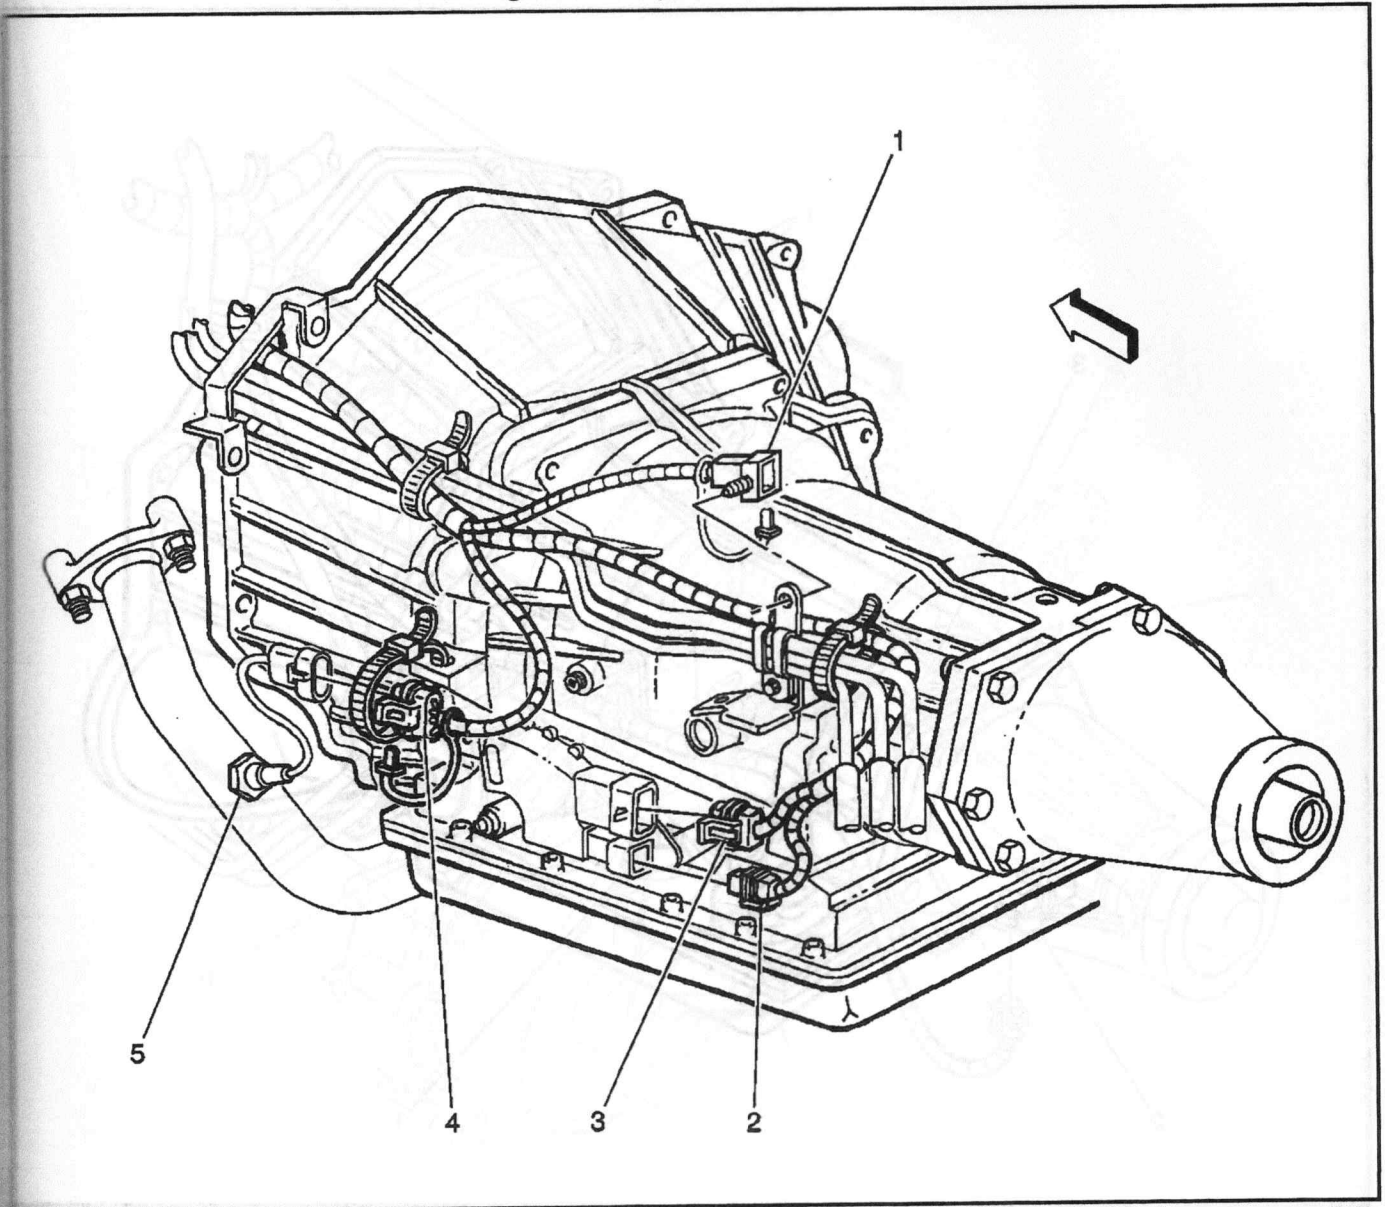


357137

357138

Legend

- | | |
|--|---|
| (1) C104 | (4) C105 |
| (2) Transmission Range Switch Connector C2 | (5) Heated Oxygen Sensor, LF (HO2S, Bank 1, Sensor 1) |
| (3) Transmission Range Switch Connector C1 | |


C104 (Chassis to 2.2L Engine Harness, 6 Cavities)

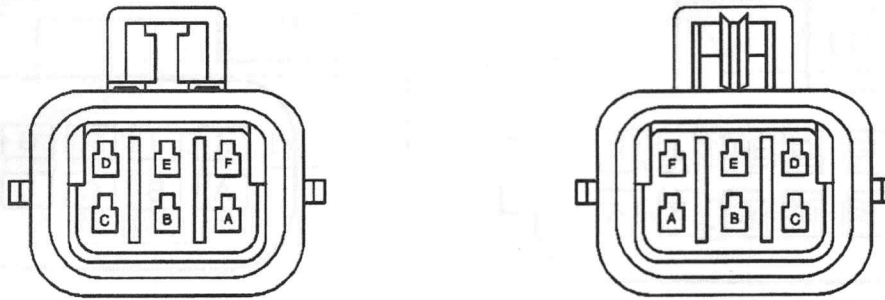

62447

Connector Part Information		<ul style="list-style-type: none"> • 12124107 • 6-Way F Metri-Pack 150 Series, Sealed, Self Locking (BLK) 		Connector Part Information		<ul style="list-style-type: none"> • 12052848 • 6-Way F Metri-Pack 150 Series, Sealed, Self Locking (BLK) 	
Pin	Wire Color	Circuit No.	Function	Pin	Wire Color	Circuit No.	Function
A	WHT	1310	Canister Vent Valve Solenoid Control	A	WHT	1310	Canister Vent Valve Solenoid Control
B	DK GRN	890	Fuel Tank Pressure Sensor Signal	B	DK GRN	890	Fuel Tank Pressure Sensor Signal
C	GRY	705	Reference Voltage Feed - 5 Volt Reference	C	GRY	705	Reference Voltage Feed - 5 Volt Reference
D	ORN/BLK	510	Fuel Sender Return	D	ORN/BLK	510	Fuel Sender Return
E	PPL	1589	Fuel Gauge Sensor Signal	E	PPL	1589	Fuel Gauge Sensor Signal
F	—	—	Not Used	F	—	—	Not Used

C104 (Chassis to 4.3L Engine Harness, 6 Cavities)

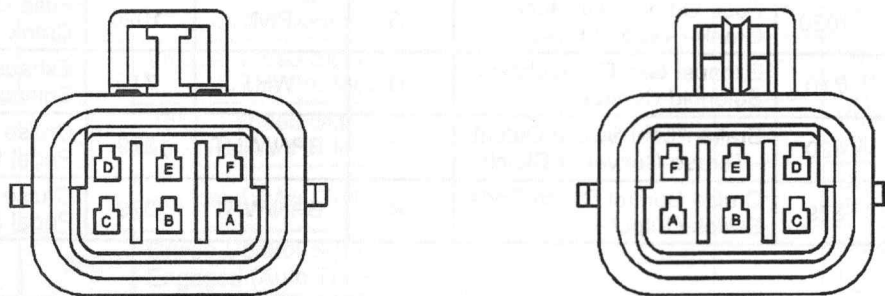

62447

Connector Part Information		<ul style="list-style-type: none"> • 12124107 • 6-Way F Metri-Pack 150 Series, Sealed, Self Locking (BLK) 		Connector Part Information		<ul style="list-style-type: none"> • 12052848 • 6-Way M Metri-Pack 150 Series, Sealed, Self Locking (BLK) 	
Pin	Wire Color	Circuit No.	Function	Pin	Wire Color	Circuit No.	Function
A	WHT	1310	Canister Vent Valve Solenoid Output	A	WHT	1310	Canister Vent Valve Solenoid Output
B	DK GRN	890	Fuel Tank Pressure Sensor Signal	B	DK GRN	890	Fuel Tank Pressure Sensor Signal
C	GRY	474	Reference Voltage Feed - 5 Volt Reference	C	GRY	474	Reference Voltage Feed - 5 Volt Reference
D	BLK/WHT	470	Fuel Sender Return	D	BLK	510	Fuel Sender Return
E	PPL	1589	Fuel Gauge Sensor Signal	E	PPL	1589	Fuel Gauge Sensor Signal
F	—	—	Not Used	F	—	—	Not Used